

NSB 100FT Red Battery™

Specifically designed for **stable mains**



Red Star Technology™ is the latest breakthrough in battery performance, delivering **exceptionally long float life**.

- **Red Star Technology™** uses pure lead grid developed to provide exceptionally long float life for telecommunication applications under stable AC grid conditions
- 15 year float life at 20°C (68°F)
- Operating temperature range -40°C to +65°C
- Superior design float life at elevated temperature
- State-of-the-art automated manufacturing ensures consistency and reliability
- Advanced 3 stage terminal design to ensure leak-free operation
 - Female M8 brass terminals provide maximum performance
- High energy density
- High modulus Polyphenylene Oxide (PPO) plastic materials designed to withstand extended elevated operating temperatures and maintain high battery compression essential for reliable operation
 - Non-halogenated, thermally sealed plastic casing and cover
 - Flame retardant (UL 94 V0) and LOI of at least 28%
- Integral handles and front access terminals ensure ease of installation and maintenance
- EUROBAT design life definition: Long Life
- 2 year shelf life at 25°C (77°F)
- Approved as non-hazardous cargo for ground, sea, and air transport
 - DOT 49CFR173.159(d), (i) and (ii)

Visit our **website** to find out more **www.northstarbattery.com**



NSB 100FT Red Battery™

Nominal Technical Specifications



Electrical

	International Standard 20°C (68°F)	North American Standard 25°C (77°F)
8 hour capacity to 1.75 VPC	98 Ah	100 Ah
10 hour capacity to 1.80 VPC	99 Ah	100 Ah
Float Voltage	2.29 +/- 0.02 Volts/Cell	2.27 +/- 0.02 Volts/Cell
Nominal Voltage	12 V	
Impedance [1kHz]	3.9 mΩ @ 25°C [77°F]	
Conductance	1,296 S	
Short Circuit Current	3,000 A	


Dimensions

Height	287 mm [11.3 in]	Weight	32 kg [70 lbs]
Width	108 mm [4.2 in]	Terminal	Female M8 x 1.25
Depth	396 mm [15.6 in]	Terminal Torque	8.0 Nm [71 in-lbs]

Ah Capacity Ratings @ 25°C (77°F)

Capacity Discharge / hours	1	2	4	8	10
Capacity @ 25°C / Ah	81	88	94	100	100
End of Discharge / VPC	1.70	1.75	1.75	1.75	1.80

Drawings

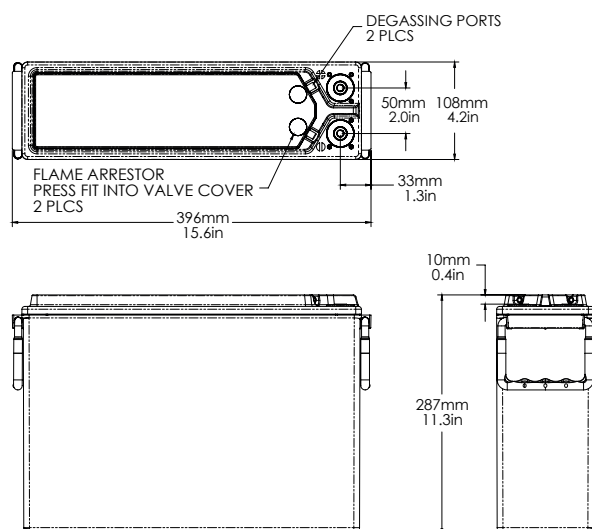

All NorthStar batteries are compliant with: Telcordia SR4228, Bellcore GR-63-Core, Issue 1; British, German, and Russian telecom standards; UL approved. NorthStar is registered to ISO 9001 and ISO 14001.

NorthStar in the Americas

NorthStar Battery Company LLC
4000 Continental Way
Springfield, MO, 65803,
United States of America
info@northstarbattery.com
Tel: +1 417 575 8200
Fax: +1 417 575 8250

NorthStar in Europe, Middle East, Africa

SiteTel Sweden AB
Staffans Väg 6-8
Box 7039, SE-192 07 Sollentuna,
Stockholm, Sweden
emea@northstarsitetel.com
Tel: +46 8 410 102 00
Fax: +46 8 638 06 00

NorthStar in Asia-Pacific

SiteTel Shanghai Co Ltd
Building 9, 1201 Gui Qiao Road
Jin Qiao Export Process Zone,
201206 Shanghai, China
asia@northstarsitetel.com
Tel: +86 21 5899 7610
Fax: +86 21 3872 2201

www.northstarbattery.com

